


## ЦАНГОВЫЕ ПАТРОНЫ ER

MTA

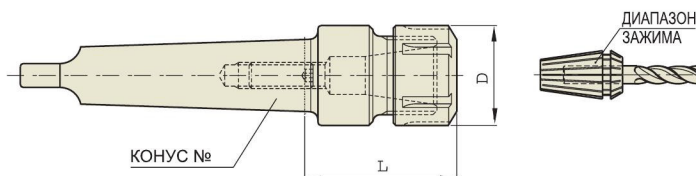

DIN228 - MTA	Степень точности конуса AT3	Класс балансировки G	Частота вращения	Система охлаждения
-----------------	--------------------------------------	-------------------------	---------------------	-----------------------

### ■ СТАНДАРТНЫЕ

КОНУС №	КОД	ДИАПАЗОН ЗАЖИМА	D	L	ГАЙКА	ЦАНГА	Масса (кг)
1	MTA1-ER11	0.5-7.0	19	35	ER11	ER11	0.30
	MTA1-ER16	0.5-10	28	40	ER16	ER16	0.35
2	MTA2-ER20	1-13	34	50	ER20	ER20	0.50
	MTA2-ER25	1-16	42	50	ER25	ER25	0.60
3	MTA3-ER25	1-16	42	60	ER25	ER25	0.60
	MTA3-ER32	2-20	50	70	ER32	ER32	0.65
4	MTA4-ER20	1-13	34	60	ER20	ER20	1.00
	MTA4-ER25	1-16	42	60	ER25	ER25	1.10
	MTA4-ER32	2-20	50	65	ER32	ER32	1.30
	MTA4-ER40	3-30	63	80	ER40	ER40	1.50
5	MTA5-ER32	2-20	50	70	ER32	ER32	2.20
	MTA5-ER40	3-30	63	80	ER40	ER40	2.40
	MTA5-ER50	6-34	78	80	ER50	ER50	2.80