


ПАТРОНЫ ER

К

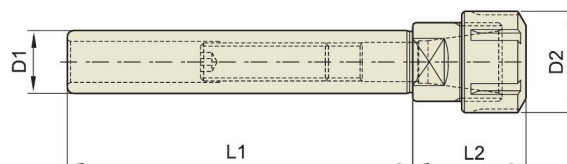

К	Степень точности конуса AT3	Класс балансировки G	Частота вращения	Система охлаждения
---	--------------------------------	----------------------	------------------	--------------------

■ СТАНДАРТНЫЕ

КОНУС №	КОД	ДИАПАЗОН ЗАЖИМА	D1	D2	L1	L2	ГАЙКА	ЦАНГА	Масса (кг)
16	K16-ER11-100	0.5-7.0	16	19	100	32	ER11	ER11	0.15
	K16-ER16-100	0.5-10.0	16	28	100	36	ER16	ER16	0.18
20	K20-ER16-100	0.5-10.0	20	28	100	36	ER16	ER16	0.25
	K20-ER20-100	1.0-13.0	20	34	100	40	ER20	ER20	0.29
25	K25-ER25-100	1.0-16.0	20	42	100	50	ER25	ER25	0.35
	K25-ER20-100	1.0-13.0	25	34	100	40	ER20	ER20	0.40
32	K32-ER25-100	1.0-16.0	25	42	100	50	ER25	ER25	0.45
	K32-ER16-100	0.5-10.0	32	28	100	36	ER16	ER16	0.50
	K32-ER20-100	1.0-13.0	32	34	100	40	ER20	ER20	0.66
	K32-ER25-100	1.0-16.0	32	42	100	50	ER25	ER25	0.75
	K32-ER32-100	2.0-20.0	32	50	100	58	ER32	ER32	1.00