


## РЕЗЬБОНАРЕЗНЫЕ ПАТРОНЫ

DIN69893-HSK

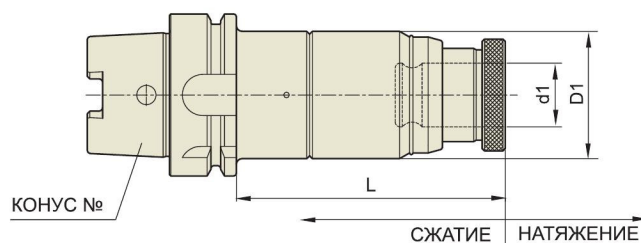

DIN69893 - HSK	Степень точности конуса AT3	Класс балансировки G	Частота вращения	Система охлаждения
-------------------	--------------------------------------	-------------------------	---------------------	-----------------------

КОНУС №	КОД	РАЗМЕР МЕТЧИКА	ДЛИНА КОМПЕНСАЦИИ		d1	D1	L	КОД АДАПТЕРА ДЛЯ МЕТЧИКОВ	Масса (кг)
			СЖАТ.	НАТЯЖ.					
63A	HSK63A-TC12-120	M3 ~ M12	5	15	19	45	120	TCS12	1.00
	HSK63A-TC12-150	M3 ~ M12	5	15	19	45	150	TCS12	1.70
	HSK63A-TC24-142	M6 ~ M24	5	20	31	63	142	TCS24	2.40
	HSK63A-TC24-172	M6 ~ M24	5	20	31	63	172	TCS24	2.70
100A	HSK100A-TC12-130	M3 ~ M12	5	15	19	45	130	TCS12	4.30
	HSK100A-TC12-175	M3 ~ M12	5	15	19	45	175	TCS12	4.80
	HSK100A-TC12-220	M3 ~ M12	5	15	19	45	220	TCS12	5.30
	HSK100A-TC24-142	M6 ~ M24	5	20	31	63	142	TCS24	5.20
	HSK100A-TC24-187	M6 ~ M24	5	20	31	63	187	TCS24	6.60
	HSK100A-TC38-200	M18 ~ M38	10	25	48	98	200	TCS38	8.00