


СВЕРЛИЛЬНЫЕ ПАТРОНЫ ДЛЯ СТАНКОВ С ЧПУ

MAS403-BT

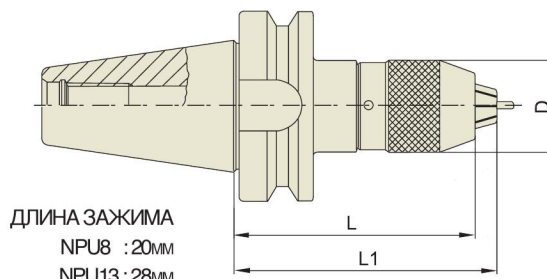

MAS403 -BT	Степень точности конуса AT3	Класс балансировки G	Частота вращения	Система охлаждения
---------------	--------------------------------------	-------------------------	---------------------	-----------------------

КОНУС №	КОД	ДИАПАЗОН ЗАЖИМА	D	L(мин)	L1(макс)	Масса (кг)
30	BT30-NPU 8- 70	0.3~8	36.5	70	75.7	0.80
	BT30-NPU13-100	1~13	50.4	100	110	1.80
40	BT40-NPU 8- 70	0.3~8	36.5	70	75.7	1.50
	BT40-NPU 8-110	0.3~8	36.5	110	115.7	1.80
	BT40-NPU 8-150	0.3~8	36.5	150	155.7	2.60
	BT40-NPU13- 90	1~13	50.4	90	95.7	2.10
	BT40-NPU13-130	1~13	50.4	130	140	2.70
	BT40-NPU13-150	1~13	50.4	150	160	3.40
50	BT50-NPU 8- 90	0.3~8	36.5	90	95.7	4.20
	BT50-NPU 8-110	0.3~8	36.5	110	115.7	4.50
	BT50-NPU 8-170	0.3~8	36.5	170	180.7	5.20
	BT50-NPU13-100	1~13	50.4	100	110	4.80
	BT50-NPU13-130	1~13	50.4	130	140	5.20
	BT50-NPU13-150	1~13	50.4	150	160	5.50
	BT50-NPU13-190	1~13	50.4	190	200	5.90